




DECKMA GmbH

Decksmaschinen und Automation Vertriebs GmbH

Fon: +49 (0)4105 - 65 60-0 · Fax: +49 (0)4105 - 65 60-25 · Web: www.deckma-gmbh.de · E-Mail: info@deckma-gmbh.de

Positionslaterne / Positionslaterne

Type 500

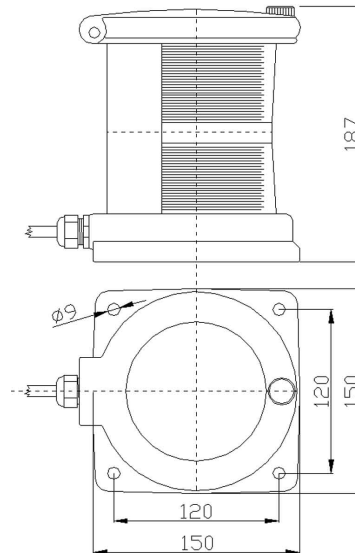

Materialien	Gehäuse und Linse aus Poly-Carbonat, glasfaserverstärkt. Schirm aus Edelstahl. Lampenfassung Bay 15d	Materials	Housing and lens of poly carbonate. glass fibre reinforced. Screen of stainless steel. Bulb holder Bay 15d
Montage	4 Schrauben Ø 8mm	Mounting	4 screws Ø 8mm
Kabel	1,5m Marinekabel 2G1,5 qmm	Cable	1,5m marine cable 2G1,5 sqmm
Schutzart	IP 56	Protection class	IP 56
Gewicht	ca. 1,8 kg	Weight	approx. 1,8 kg
Spannung	24V / 25W	Voltage	24V / 25W

Type	Merkmale	Features	Best. Nr. / Order No.
S Bb 500	Backbord, rot 112,5°	Port side, red 112,5°	001-980
S Sb 500	Steuerbord, grün 112,5°	Starboard side, green 112,5°	001-973
T 500	Toplaterne, weiss 225°	Top lantern, white 225°	001-978
H 500	Hecklaterne, weiss 135°	Stern lantern, white 135°	001-979
HS 500	Schlepplaterne, gelb 135°	Tow lantern, yellow 135°	001-965
AS 500	Ankerlaterne, weiss 360°	Anchor lantern, white 360°	001-933
AS 500	Signallaterne, rot 360°	Signal lantern, red 360°	001-932
AS 500	Signallaterne, grün 360°	Signal lantern, green 360°	001-931
AS 500	Signallaterne, gelb 360°	Signal lantern, yellow 360°	001-930