



DECKMA GmbH

Decksmaschinen und Automation Vertriebs GmbH

Fon: +49 (0)4105 - 65 60-0 · Fax: +49 (0)4105 - 65 60-25 · Web: www.deckma-gmbh.de · E-Mail: info@deckma-gmbh.de

LED Deckenleuchte, Einbau / LED ceiling light fixture recessed

DLT RS(M) 1400 FR1

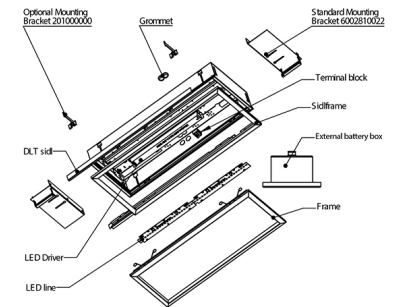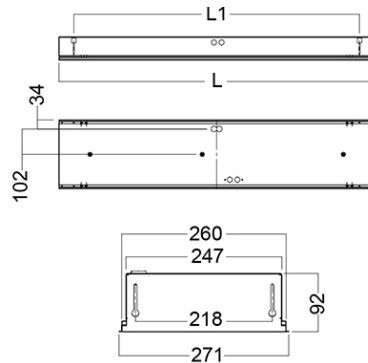

Materialien	Stahlblech verzinkt, Lackierung: Weiß pulverbeschichtet RAL 9016 Prismatische Lampenabdeckung FR1	Housing	Zinc coated steel Finish: Powder coated white RAL 9016 Prismatic diffuser FR1
Montage	Optionale Montagewinkel	Mounting	Optional mounting brackets
Spannung, Frequenz	220-240V, 50-60Hz	Voltage	220-240V, 50-60Hz
Leuchtmittel	LED 2x 8W CRI>80, 5000K	Light source	LED 2x 8W CRI>80, 5000K
Schutzart	IP 20	Protection class	IP 20
Kabeleinführung	2 Dichtungen für Kabel max. 12,7 mm Durchmesser	Cable entry	2 grommets for max. cable Ø12.7 mm
Abmessungen	637mm x 271mm x 92mm	Dimensions	637mm x 271mm x 92mm
Gewicht	ca. 4,0 kg	Weight	ca. 4,0 kg
Merkmale	Unterschiedliche Varianten verfügbar	Remarks	Different version available
Type	Merkmale	Features	Best. Nr. / Order No.
DLT RS (M) 1400 HF 830 FR1	LED 2x8W	LED 2x8W	009-504
DLT RS (M) 1400 HFDa 830 FR1	LED 2x8W Dimmbar	LED 2x8W Dimmable	009-506
DLT RS (M) 1400 HF-EB3 830 FR1	LED 2x8W mit 3h Notbatterie	LED 2x8W with 3h backup battery	009-507